


APPLICATION: \_\_\_\_\_ PRODUCT NAME: RIGID GOOSENECK SPOUT ASSEMBLY

JOB NAME: \_\_\_\_\_  \_\_\_\_\_ SPECIAL CONFIGURATION CHECK BASE MODEL AND OPTIONS

QUANTITY: \_\_\_\_\_ ITEM NO. \_\_\_\_\_

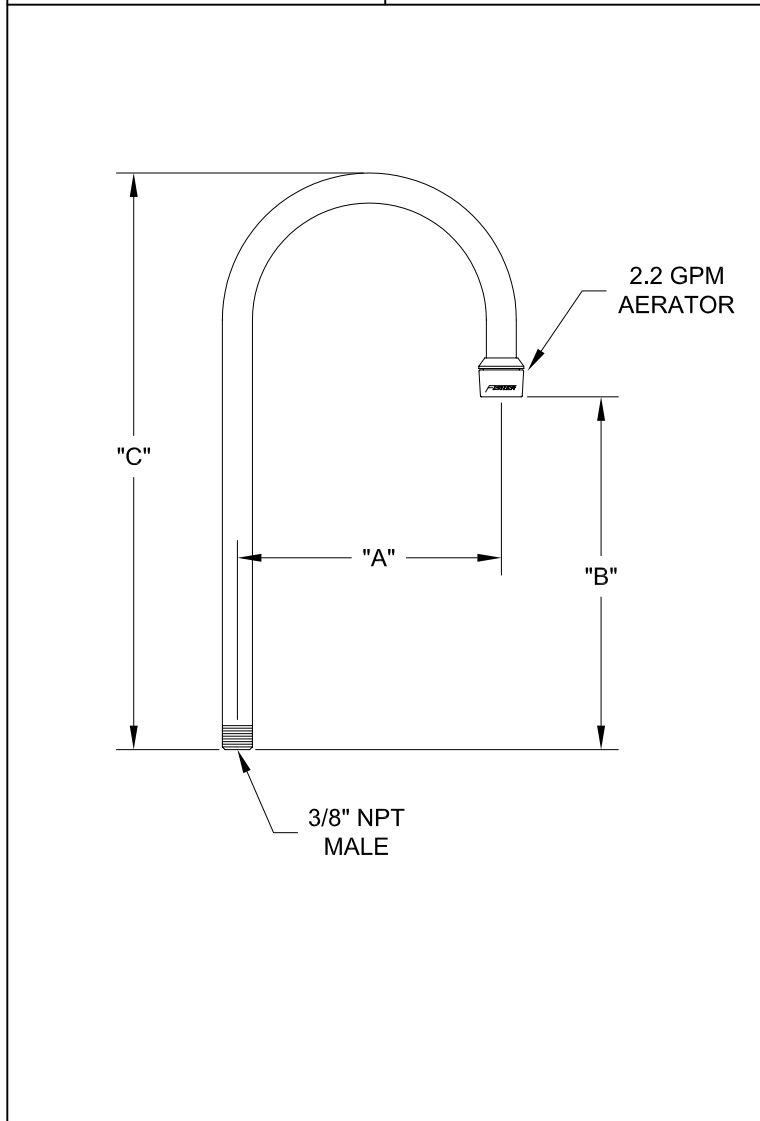

MODEL:  
 3966 12" RIGID GOOSENECK SPOUT  
 9041 10" RIGID GOOSENECK SPOUT  
 3969 6" RIGID GOOSENECK SPOUT

OPTIONS OR MODIFICATIONS:  
 OTHER \_\_\_\_\_

FEATURES  
 \* 2.2 GPM AERATOR  
 SYSTEM LIMITS  
 \* TEMP: 40°F MIN. TO 140°F MAX.  
 \* PRESSURE: 200 PSI MAX. STATIC  
 SHIPPING WEIGHT  
 \* 0.75 LBS

MODEL	DIM "A"	DIM "B"	DIM "C"
3966	5-1/2" [140mm]	7-3/8" [187mm]	12" [304mm]
9041	5-1/2" [140mm]	5-1/8" [130mm]	9-1/2" [241mm]
3969	3-1/2" [89mm]	3-3/8" [86mm]	7" [180mm]

ANSI/A112.18.1M

***FISHER***  
 FISHER MANUFACTURING COMPANY  
 TOLL FREE: 800-421-6162 - FAX: 800-832-8238  
 information@fisher-mfg.com - www.fisher-mfg.com